

#### Features of LiFePO<sub>4</sub> Battery

- **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range:** -20°C~60°C.
- **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- **Increased Flexibility:** Modular design enables deployment of up to four batteries in series and up to ten batteries in parallel.



#### Physical Dimension

- Overcharge detection function Over
- discharge detection function Over
- current detection function
- Temperature protection
- Short detection function
- Balance function

#### Application


- Electric vehicles, electric mobility
- Solar/wind energy storage system
- UPS, backup power
- Telecommunication
- Medical equipment
- Lighting

#### Specification

Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	100Ah
	Energy	2560Wh
	Internal Resistance	≤ 20mΩ
	Cycle Life	>2000cycles @1.0C rate
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	28.8±0.1V
	Charge Mode	0.2C to 28.8V, then 28.8V,charge current to 0.02C (CC/CV)
	Charge Current	50A
	Max. Charge Current	100A
	Charge Cut-off Voltage	29.2V±0.1V
Standard Discharge	Recommend Continuous Current	100A
	Max continuous discharge current	100A
	Discharge Cut-off Voltage	20V
Environmental	Charge Temperature	0℃ to 45℃ (32F to 113F) @60±25% Relative Humidity
	Discharge Temperature	-20℃ to 60℃ (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	-20℃ to 60℃ (-4F to 140F) @60±25% Relative Humidity
	Water Dust Resistance	IP65
Mechanical	Cell & Method	3.2 100Ah 8S1P
	Shell material	ABS
	Dimensions (in./mm.)	L485*W172*H240mm (19.09**6.77**9.45")
	Weight (lbs./kg.)	20,4kg
	Terminal	M8
	Communication	Bluetooth APP
	Heating	With
For long time no use the battery, please charge it every 6 months.		


### Different Rate Discharge Curve

Different Rate Discharge Curve @25°C

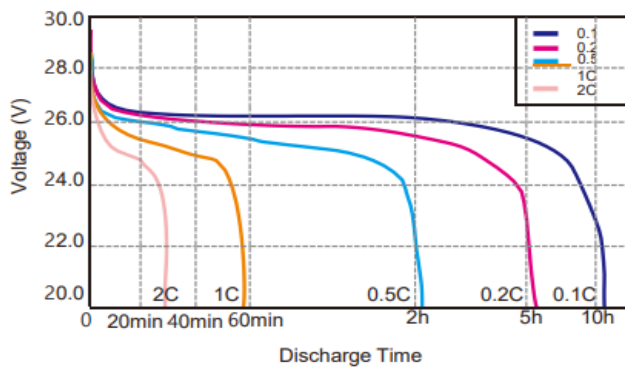


### Different Temperature Discharge Curve

Different Temperature Discharge Curve @0.5C

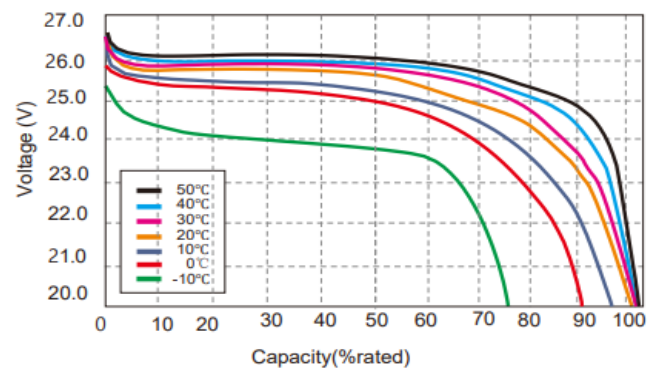


### State of Charge Curve

State of Charge Curve @0.5C 25°C

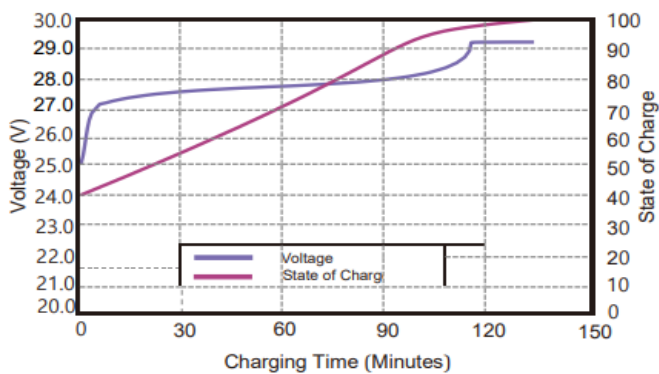


### Charging Characteristics

Charging Characteristics @0.5C 25°C

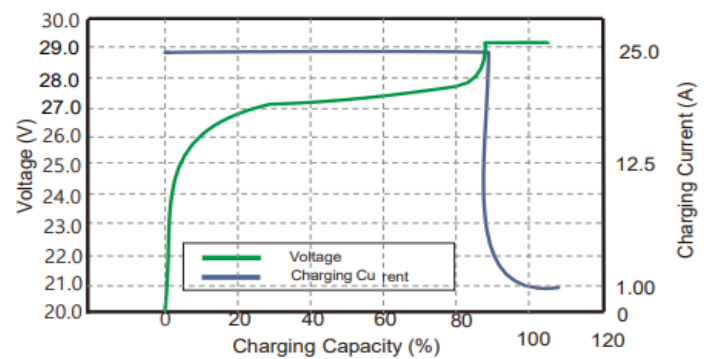

### Cycle Life Curve

Different DOD Discharge Cycle Life Curve @1C

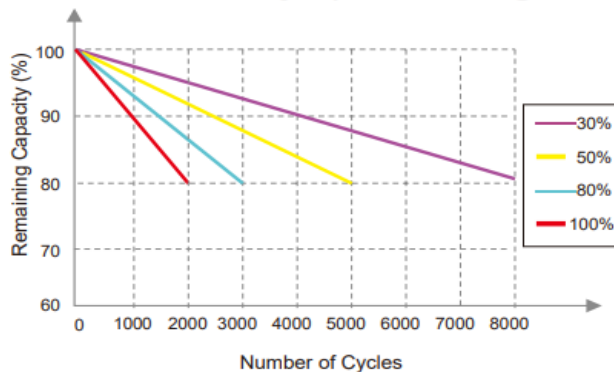

### Self Discharge Characteristics Curve

Different Temperature Self Discharge Curve

